

MST-215



MST-215




Specification

2-Way
Trapezoid Sound
Reinforcement Enclosure
Power Capacity
4000 Watt



MST-215

Enclosure Dimension :

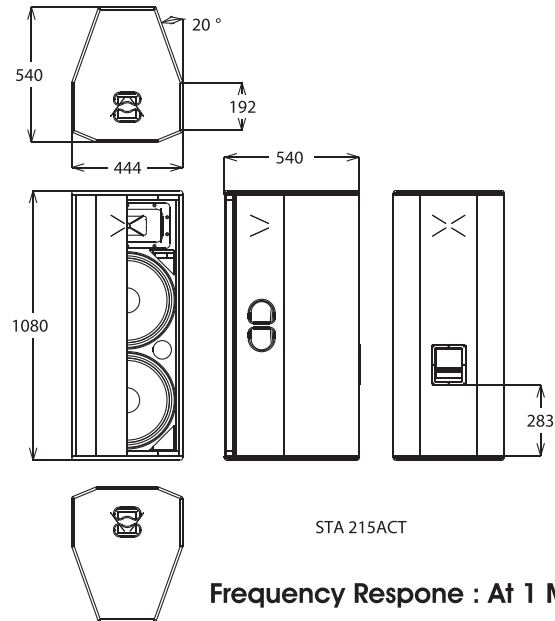

Net Weight : 52 kgs

Frequency Response : At 1 Meter / Watt

SPECIFICATION

Power Capacity (AES Standards)
RMS
Program
Frequency Response

Output Sensitivity

Coverage

FEATURE

Recommended Application
Woofer Section

Compression Driver
Box Construction

Grille

2-Way Trapezoid Sound Reinforcement Enclosure

2000 Watt
4000 Watt
55Hz (-10DB) to 16000Hz

112 DB, Program Power / 1 Meter (55Hz - 16000Hz)
Max 146 DB, Program Power / 1 Meter (55Hz - 16000Hz)

90 x 50 Degree Constant Directivity Horn

Matching Amplifier
SoundTech SA2350 2 X 2350 @ 8 Ohm

>Extremely High SPL Point Source
>Heavy Duty Usage
>Wide Coverage

DJ Club, Outdoor Event, Pub Café, Mobile DJ

Impedance 8 Ohm
STA 15 - LFG400 1 x 15" 1000 Watt AES
4 inch Coil Low Sub
STA 15 - 2226 1 x 15" 800 Watt AES
4 inch Coil Mid Bass

Impedance 8 Ohm DE82 TN Driver 76 mm Coil, 1.4 inch Throat
Plywood 18 mm Engineered
Wood Composite Structure, Black Finish, 2 Handles
Perforate Metal Grille with UV Protect Nylon Fabric