


# MP15R2



MP15R2

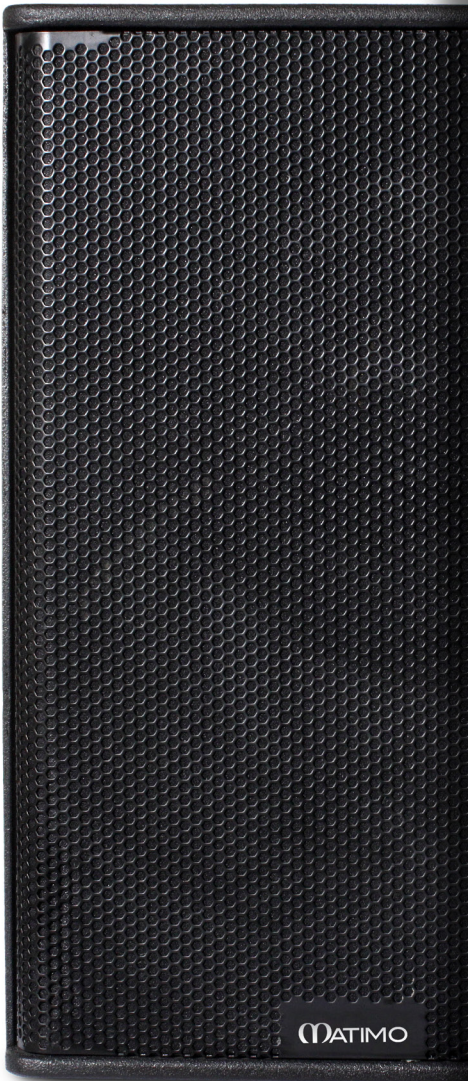

## Specification

### 2-Way

Trapezoid Sound  
Reinforcement Enclosure

Very High Power Point Source  
2000 Watt Program Power

Power Capacity


**2000 Watt**





# MPS15 R2

Enclosure Dimension :

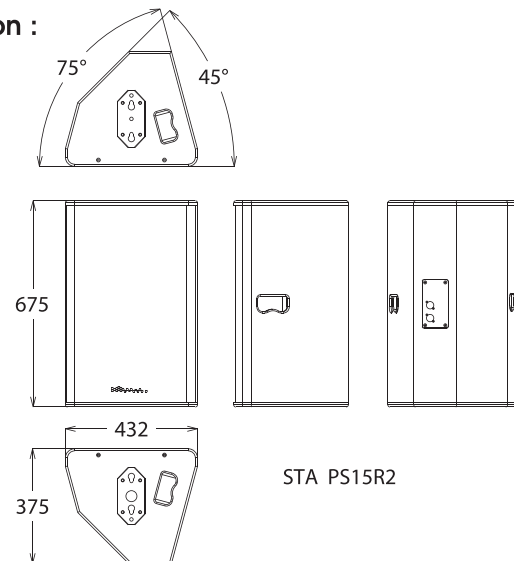

Net Weight : 32 kgs

Frequency Response : At 1 Meter / Watt

## SPECIFICATION

Power Capacity (AES Standards)

RMS

Program

Frequency Response

Output Sensitivity

## 2-Way Trapezoid Sound Reinforcement Enclosure

1000 Watt

2000 Watt

55Hz (-10DB) to 16500Hz

112 DB, 1 Meter / Watt (55Hz - 16500Hz)

136 DB, Program Power / 1 Meter (55Hz - 16500Hz)

can match with SA2350 SoundTech Class D

Amplifier 2 x 2350 @ 8 Ohm

Horn Directivity

50° to 100° Horizontal x 55° Vertical

## FEATURE

>Extremely High Power Point Source

>Compact Design

Recommended Application

>Point Source

>Stage Monitor

Woofer Section

Woofer 1 x 15" 15 LFG400

Impedance 8 Ohm 1000 Watt AES

High Driver

DE82 TN 1.4 inch Throat

Impedance 8 Ohm 110 Watt AES

Voice Coil 76 mm Composite Material

Box Construction

Plywood 15 mm Engineered Wood Composite Structure,  
Black Finish, 4 Handles

Grille

Perforated 1 piece Metal Grill with Nylon

UV Protect Cloth

Input Connectors

Speedcon® NL-8 (2x) Pins 1 +/- & 2 +/-