


MP S12R2 500(A)

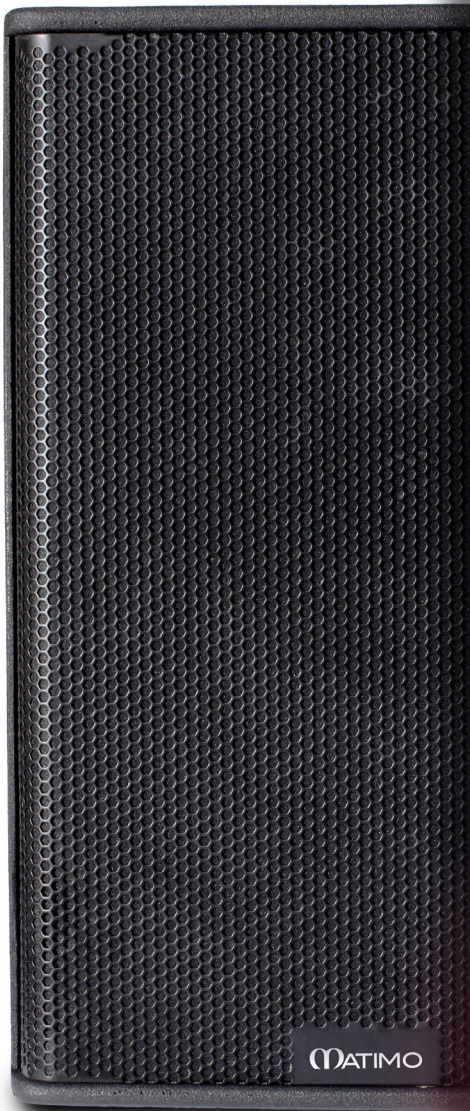

MPS12R2500(A)

Specification

2-Way

Trapezoid Sound Reinforcement Enclosure

Built in Active Module 900 Watt @ 8 Ohm






MPS12R2500(A)



Enclosure Dimension :

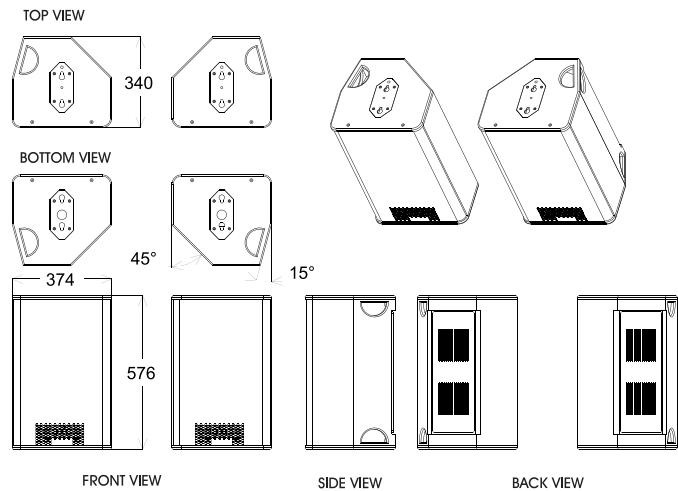

Net Weight : 28 kgs

Frequency Response : At 1 Meter / Watt

SPECIFICATION

Power Capacity (AES Standards)
RMS
Program
Frequency Response

Output Sensitivity

Horn Directivit

FEATURE

Recommended Application

Woofer Section

High Driver

Box Construction

Grille

Input Connectors

2-Way Trapezoid Sound Reinforcement Enclosure
Built in Active Module 900 Watt @ 8 Ohm

500 Watt
1000 Watt
65Hz (-10DB) to 18500Hz

110 DB 1 Meter / Watt, (65Hz - 17500Hz (Continuous))
132 DB, Program Power / 1 Meter (65Hz-17500Hz (Continuous))

50° to 100° Horizontal x 55° Vertical

> Built in Active Module with 24 bit DSP
> Compact Design

> Point Source
> Stage Monitor

Woofer 1x 12" STA STA 12EVSM
Impedance 8 Ohm 500 Watt AES

DE160 (8 Ohm) 40 Watt AES, 44 mm Coill

Plywood 15 mm Engineered Wood Composite Structure,
Black Finish, 4 Handles

Perforated Steel Metal Grilles with Weather Proof Fabric

Speakon® NL-8 (2x) Pins 1 +/- & 2 +/-