


MP15 R2-500



MPS15 R2-500

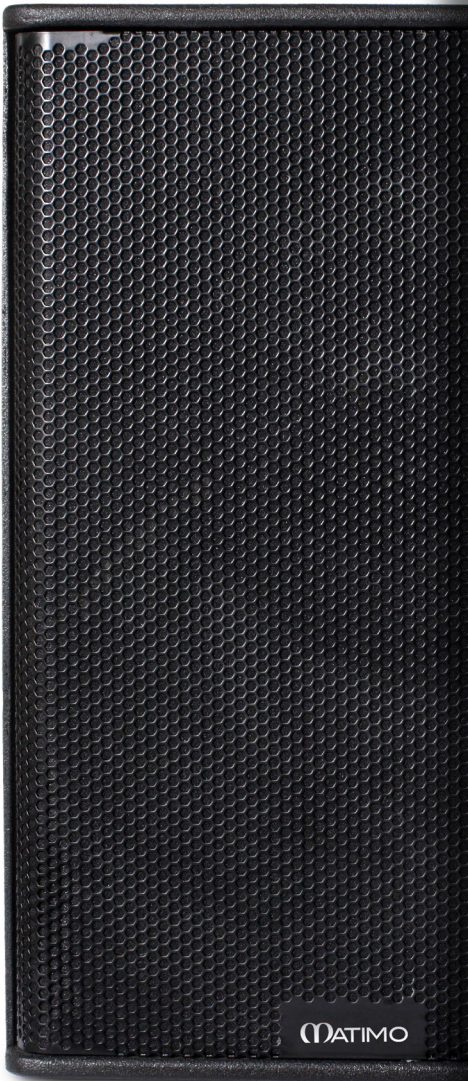

Specification

2-Way

Trapezoid Sound
Reinforcement Enclosure


High Power Stage Monitor
1000 Watt Program Power

Power Capacity

1000 Watt



Enclosure Dimension :

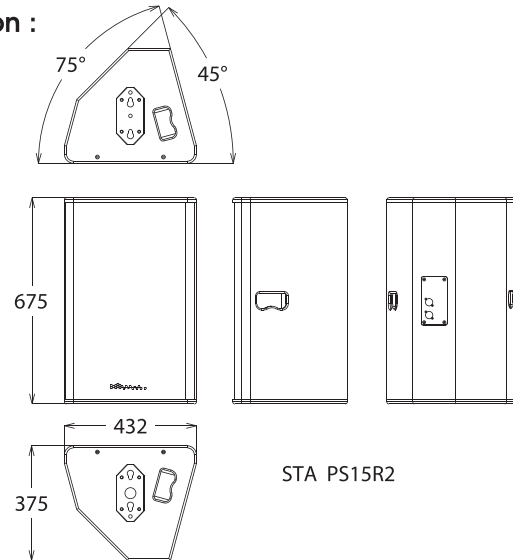

Net Weight : 22 kgs

Frequency Responce : At 1 Meter / Watt

SPECIFICATION

Power Capacity (AES Standards)
RMS
Program
Frequency Response
Output Sensitivity

FEATURE

Recommended Application
Woofer Section
High Driver
Box Construction
Grille
Input Connectors

2-Way Trapezoid Sound Reinforcement Enclosure

500 Watt
1000 Watt
55Hz (-10DB) to 16500Hz

112 DB, 1 Meter / Watt (55Hz - 18000Hz)
136 DB, Program Power / 1 Meter (55Hz - 18000Hz)
can match with SA2350 SoundTech Class D
Amplifier 2 x 2350 @ 8 Ohm

Horn Directivity
50° to 100° Horizontal x 55° Vertical

>Extremely High Power Point Source
>Compact Design
>Point Source
>Stage Monitor

Woofer 1 x 15" 15 BM500
Impedance 8 Ohm 500 Watt AES
DE160(8), 1 inch Throat
Impedance 8 Ohm 40 Watt AES
Voice Coil 44 mm Composite Material

Plywood 15 mm Engineered Wood Composite Structure,
Black Finish, 4 Handles

Perforated 1 piece Metal Grill with Nylon
UV Protect Cloth

Speedcon® NL-8 (2x) Pins 1 +/- & 2 +/-