


# MPS12R2-500



MPS12R2-500

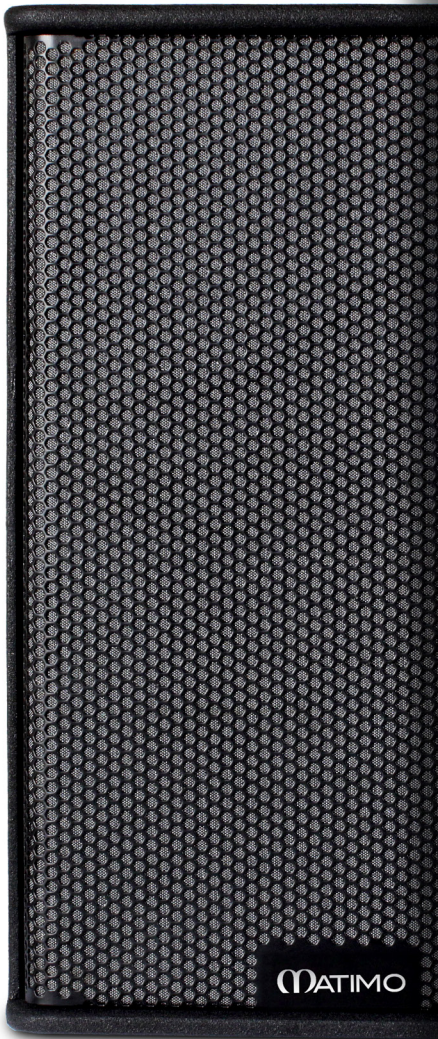

## Specification

**2-Way**  
Trapezoid Sound  
Reinforcement Enclosure


Power Capacity  
**1000 Watt**





# MPS12 R2-500

Enclosure Dimension :

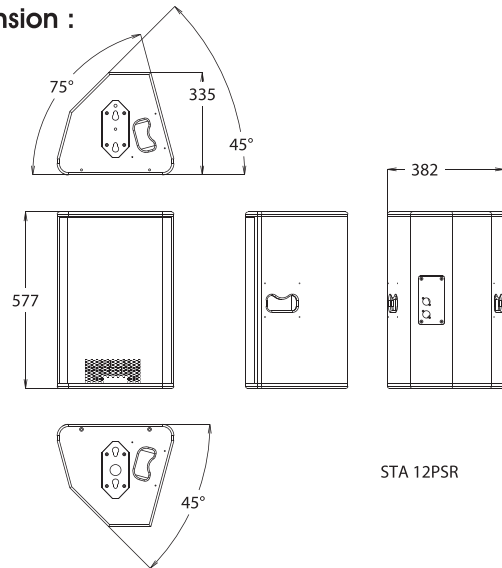

Net Weight : 21 kgs

Frequency Response : At 1 Meter / Watt

## SPECIFICATION

Power Capacity (AES Standards)  
RMS  
Program  
Frequency Response

Output Sensitivity

## FEATURE

Recommended Application

Woofer Section

High Driver

Box Construction

Grille

Input Connectors

Handle

2-Way Trapezoid Sound Reinforcement Enclosure

500 Watt  
1000 Watt  
55Hz (-10DB) to 18500Hz

110 DB, 1 Meter / Watt (65Hz - 17500Hz (Continuous))  
132 DB, Program Power / 1 Meter (65Hz - 17500Hz (Continuous))

Horn Directivity  
50° to 100° Horizontal x 55° Vertical

>High Power Point Source  
>Compact Design

>Point Source  
>Stage Monitor

Woofer 1 x 12" STA 12 PS  
Impedance 8 Ohm 500 Watt AES  
Impedance 8 Ohm 40 Watt AES  
Voice Coil 44 mm

Plywood 15 mm Engineered Wood Composite Structure,  
Black Finish, 4 Handles

Perforated Metal Grill Wrapped with UV and Waterproof Nylon Fabric

Speedcon® NL-8 (2x) Pins 1 +/- & 2 +/-

Speedcon® NL-8 (2x) Pins 1 +/- & 2 +/-